

**DS-KD-KK**

## **Video Intercom Nametag Module**



### **Key Feature**

- Dial the resident at one-touch
- Backlight compensation
- Easy and extend

### **Available Model**


DS-KD-KK




## Specification

<b>Model</b>		<b>DS-KD-KK</b>
<b>System parameters</b>	<b>Processor</b>	Embedded MCU Processor
	<b>Operation method</b>	Physical Button
<b>Interfaces</b>	<b>Module-connecting</b>	2(1 Input, 1 Output)
	<b>Debug</b>	1
<b>General</b>	<b>Physical button</b>	6
	<b>DIP Switch</b>	8
	<b>Power supply</b>	Powered by DS-KD8003-IME1
	<b>Power consumption</b>	≤2 W
	<b>Working temperature</b>	-40° C to +60° C (-40° F to 140° F)
	<b>Working humidity</b>	10% to 95%
	<b>IP protection level</b>	IP65
	<b>Installation</b>	Flush Mounting, Surface Mounting
<b>Dimensions (L × W × H)</b>	98.21 mm × 100.21 mm × 33.7 mm (3.87" × 3.95" × 1.33")	

## Typical Application

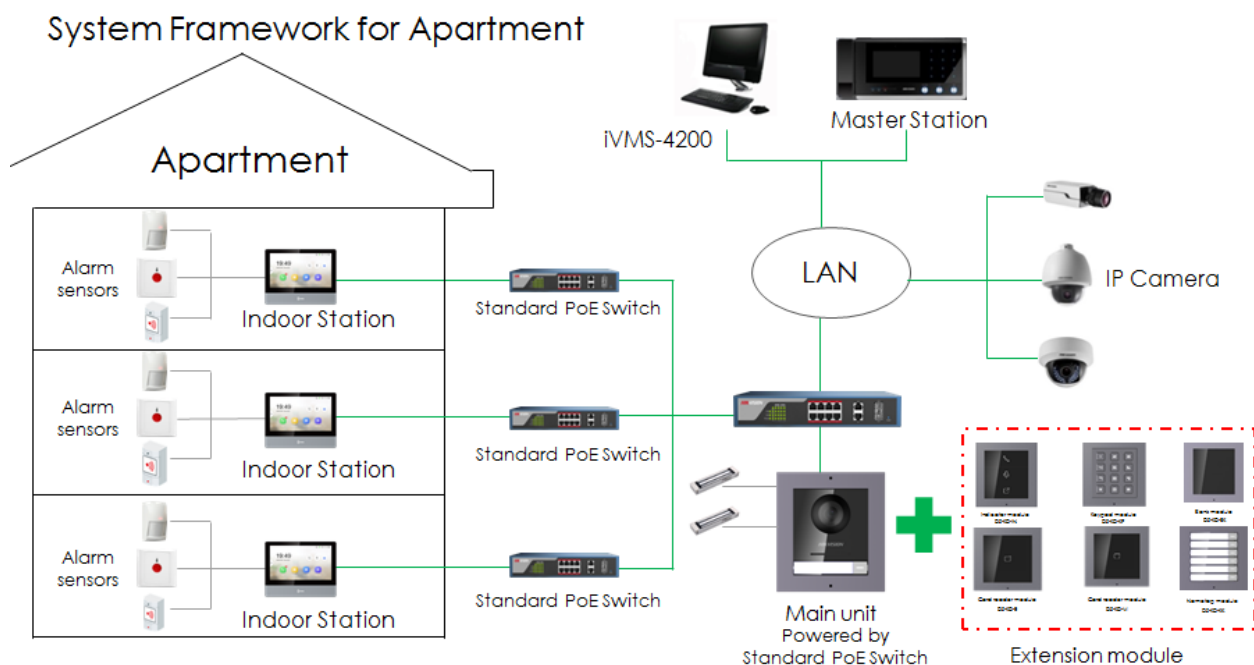

## Appearance and Interface

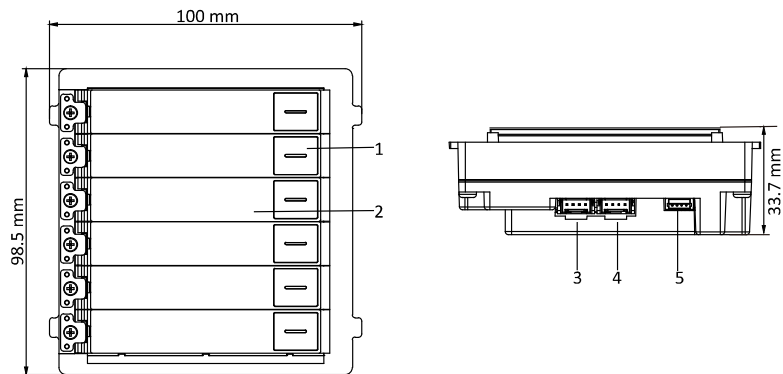

No.	Description
1	Call Button
2	Name Tag
3	Module-connecting Interface(output)
4	Module-connecting Interface(input)
5	Debug